
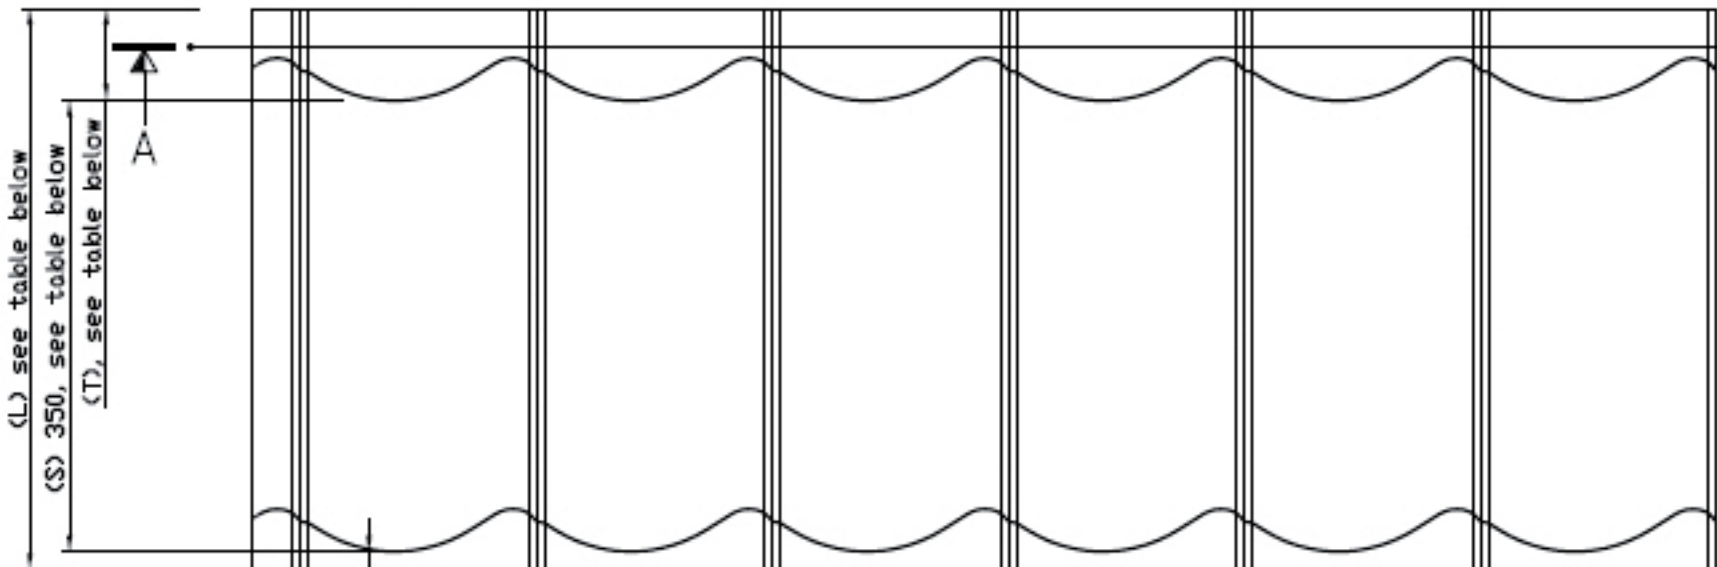



OVER LAPPING

4:1

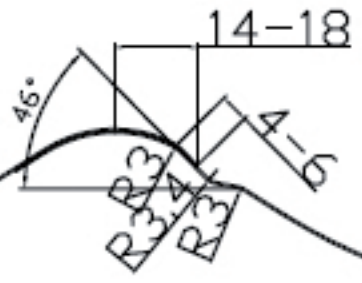

(L) see table below  
(S) 350, see table below  
(T), see table below

SECTION A-A

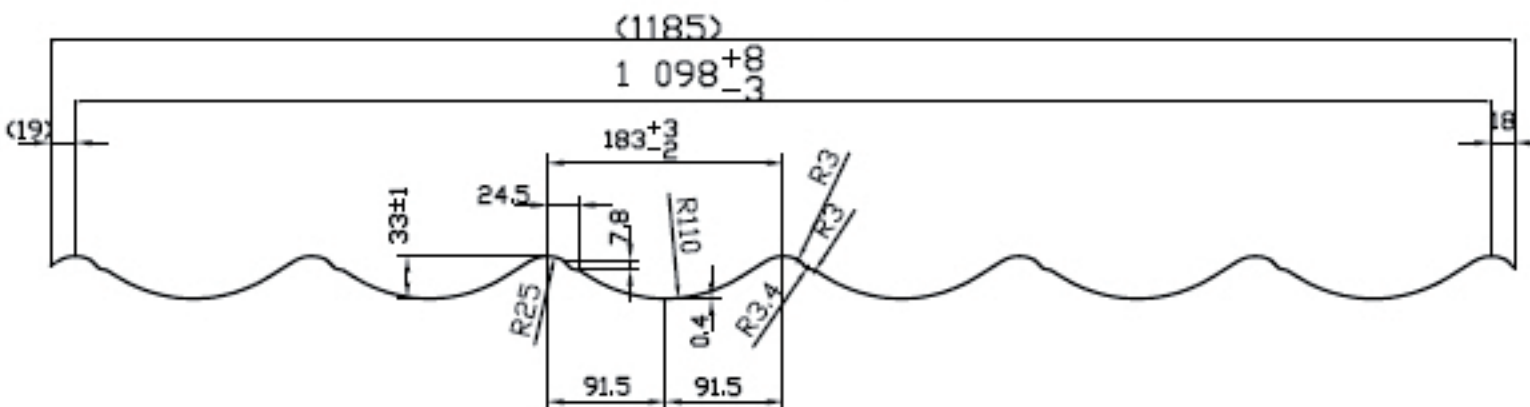

Profile approved	
Name clarification	
Signature	
Date	

Height of step	10 or 17 mm
Step length (S)	350 mm
Front edge (F)	10mm-35mm
Raw material thickness	0.35-0.6 mm
Raw material width	1230 mm +5/-0
Raw material quality according to quotation/contract	
Sheet length (L) is 0.45 - 6.5 m	

Tolerances according to EN508-1/2000

Dimensions are measured at step

Raw material yield strenght (Rp0.2) 280-360 N/mm2 (after coating, tested according to EN 10147)  
Rp0.2 / Rm relation of the material shall be <0.9 and Ae shall be <5%

Osa / Part	Piirustusnumero / Drawing Number	Osan tai kokoonpanoryhmän nimitys / Description	Mitat, muoto, malli / Dimensions, shape, model	Materiaali / Material	Määrä / Amount	Kpl / Reg'd
<p>Tässä oleva informaatio on Macring Oy:n omaisuutta, eikä sitä saa jäljentää, näyttää kolmannelle osapuolelle tai käyttää millään tavalla ilman Macring Oy:n tai sen asemukaaisesti valittujen edustajien nimenomaisia kirjallista lupaa.</p> <p>The information contained herein is proprietary to Macring Oy and is not to be reproduced, communicated to a third person or used in any manner whatsoever without the express written permission of Macring Oy or a duly authorized representative thereof.</p>						
Toleranssit - Tolerances		Pintakäsittely - Surface Finishing		Massa / Weight	Mittakaava / Scale	
		Väri - Color		Lask. / kg	1:5	
				Punn. / kg	Projekti / Project	
		Profile MRT 33-183 Tile Sheet / Styledek		Suon. - Drawn by 06.09.12 KPa		
				Tark. - Checked by		
				Piirustusnumero / DWGNO 21331831-0		